


Model #	SUN866D NK8SV(WC)
SKU	19728
Metal Finish	Brushed Nickel
Blade Finish	Silver
Glass Finish	White
Blade Span	66"
Motor Specs	DC165M-DC
Wire Length (Shown in inches)	80"
Down Rod Included (Shown in inches)	6"
Blade Pitch	14
Speed	6
Forward/Reverse	Yes
Airflow (CFM High)	8280
Power Use (Watts)	30.56
Airflow Efficiency (CFM/Watt)	270.95
Light Kit Included	Yes
Lamp Info	Integrated LED
Location Use	Outdoor Only
Wall Control	WC-SUN866

Finish/Glass Shown: Brushed Nickel/White



Integrated LED

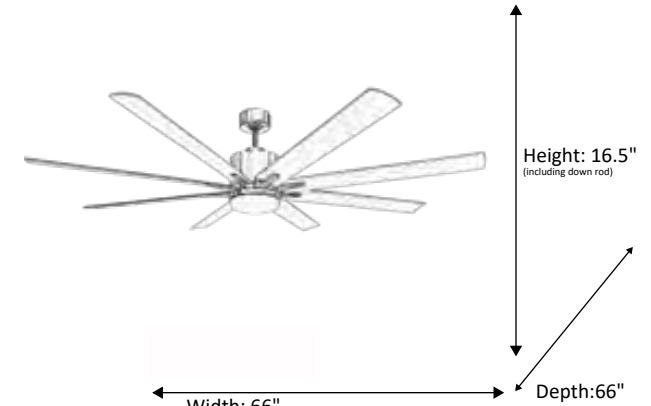

UL

*Dimensions shown in inches



WC-SUN866-WH Wall Control Included

- 6 Speed Fan Control
- Reverse Control
- Simple On/Off Switch
- 6 Speed Fan Control
- Easy 2 Wire Connection (Requires 2 Hot Leads)
- Available in White (WH) Only

ELECTRICAL REQUIREMENTS: Fixture requires a grounded electrical supply line of 120 volts AC.

INSTALLATION REQUIREMENTS: Fixture attaches to electrical junction box securely anchored in wall or ceiling.
All mounting hardware included.

HOMEnhancements / 1505-A Kelly Blvd., Carrollton, TX. 75006

Product specifications subject to change without notice.

REFERENCE	QTY.	REMARKS	Project
			Location/Type
			Architect
			Engineer
			Contractor
			Submitted By: _____ Date: _____